

(51) International Patent Classification: H01L 51/20	A1	(11) International Publication Number: (43) International Publication	WO 00/36661 22 June 2000 (22.06.2000)
(21) International Application Number: PCT/GB99/04144 (22) International Filing Date: 14 December 1999 (14.12.1999) (30) Priority Data: 9827827.8 17 December 1998 (17.12.1998) GB 9922723.3 24 September 1999 (24.09.1999) GB (60) Parent Application or Grant CAMBRIDGE DISPLAY TECHNOLOGY LTD. [/]; O. HEEKS, Stephen, Karl [/]; O. BURROUGHES, Jeremy, Henley [/]; O. CARTER, Julian, Charles [/]; O. HEEKS, Stephen, Karl [/]; O. BURROUGHES, Jeremy, Henley [/]; O. CARTER, Julian, Charles [/]; O. HARTWELL, Ian, Peter ; O.		Published	
(54) Title: ORGANIC LIGHT-EMITTING DEVICES (54) Titre: DELS ORGANIQUESMITTING DEVICES			
(57) Abstract <p>An organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material.</p> (57) Abrégé <p>L'invention porte sur une DEL organique comportant une couche de matériau organique photoémetteur placée entre une première électrode et une deuxième électrode dont l'une au moins comporte une ou plusieurs couches d'électrode recouvrant la couche de matériau organique photoémetteur et servant à injecter des porteurs de charges dans le matériau organique photoémetteur. Le dispositif photoémetteur comprend en outre une couche de matériau diélectrique disposée à la surface de la couche d'électrode la plus distante de la couche de matériau organique photoémetteur.</p>			

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H01L 51/20	A1	(11) International Publication Number: WO 00/36661 (43) International Publication Date: 22 June 2000 (22.06.00)
(21) International Application Number: PCT/GB99/04144 (22) International Filing Date: 14 December 1999 (14.12.99) (30) Priority Data: 9827827.8 17 December 1998 (17.12.98) GB 9922723.3 24 September 1999 (24.09.99) GB (71) Applicant (for all designated States except US): CAMBRIDGE DISPLAY TECHNOLOGY LTD. [GB/GB]; Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): HEEKS, Stephen, Karl [GB/GB]; Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB). BURROUGHES, Jeremy, Henley [GB/GB]; Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB). CARTER, Julian, Charles [GB/GB]; Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB).		(74) Agents: HARTWELL, Ian, Peter; Cambridge Display Technology Ltd., Greenwich House, Madingley Rise, Madingley Road, Cambridge CB3 0HJ (GB) et al. (81) Designated States: AT, AU, BR, CA, CH, CN, CZ, DE, DK, ES, FI, GB, IL, IN, JP, KR, LU, MX, PT, RU, SE, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: ORGANIC LIGHT-EMITTING DEVICES (57) Abstract An organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

ORGANIC LIGHT-EMITTING DEVICES

5

This invention relates to organic light-emitting devices (OLEDs).

10

Organic light-emitting devices such as described in US Patent No. 5,247,190 or in US Patent No. 4,539,507, the contents of which are incorporated herein by reference, have great potential for use in various display applications. According to one method, an OLED is fabricated by coating a glass or plastic substrate with a transparent first electrode (anode) such as indium tin oxide (ITO). At least one layer of a thin film of an electroluminescent organic material is then deposited prior to a final layer which is a film of a second electrode (cathode) which is typically a metal or alloy.

15

20

25

From the point of view of electron-injecting properties, a layer of a metal having a low work function such as calcium or an alloy containing a metal having a low work function are the preferred materials for the cathode. However, it is an intrinsic property of such low work function elements that they are very prone to reactions with reactive ambient species such as oxygen or moisture. Such reactions detrimentally affect the electron-injecting properties of the cathode causing the formation of non-emitting black spots with a consequent degradation in device performance.

30

35

It is therefore an aim of the present invention to provide an organic light-emitting device which is less prone to the formation of non-emitting black spots and therefore displays improved resistance to performance degradation.

40

It is another aim of the present invention to provide a method of producing a protective cap for an electrode of an organic light-emissive device which minimizes damage to the underlying organic layers.

45

According to one aspect of the present invention, there is provided an organic light-emitting device comprising at least one layer of a light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the

50

55

5 light-emissive material; wherein the organic light-emitting device further has a stack comprising an inert barrier layer and at least one gettering layer interposed between the outermost electrode layer and the inert barrier layer for absorbing moisture and oxygen.

10 The advantages of this aspect of the present invention are particularly pronounced when the electrode upon which the stack is formed comprises at least one layer deposited by vacuum evaporation.

15 The inert barrier layer serves to minimize the entry of reactive species into the device, and the gettering layer serves to absorb any traces of reactive species which manage to somehow permeate through the inert barrier layer.

20 The inert barrier layer is preferably a layer of an inorganic dielectric material preferably selected from the group consisting of AlN, Al₂O₃, SiO₂ and Si₃N₄, and preferably has a thickness in the range of 0.01 to 10 microns, further preferably in the range of 1 to 10 microns. The inert barrier layer is preferably deposited by a sputtering technique to provide a pinhole-free layer.

30 The gettering layer is preferably a layer of a material which displays high reactivity towards moisture and oxygen such as Li, Ca, Ba or Cs, or an alloy of the same such as LiAl, or a hygroscopic oxide such as BaO. It preferably has a thickness in the range of 0.01 to 5 microns. Calcium is a particularly preferred material for the gettering layer. The gettering layer may be deposited by a sputtering technique to provide a pinhole-free layer. Alternatively, it may be deposited by a vacuum evaporation technique.

45 According to another aspect of the present invention, there is provided an organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a

5 layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material.

10 The advantages of this aspect of the present invention are also particularly pronounced when the electrode upon which the dielectric layer or layers is formed comprises at least one layer deposited by vacuum evaporation.

15 In one embodiment of the present invention, the organic light-emitting device further comprises a second layer of dielectric material on the first layer of dielectric material, the thickness of the dielectric layers being selected so as to reduce mechanical stress on the electrode.

20 Suitable dielectric materials for each of the first and second layers include inorganic dielectric materials, preferably SiO, AlN, SiO₂, Si₃N₄ and Al₂O₃. The thickness of each of the dielectric layers is preferably in the range of 0.01 to 10 microns, preferably in the range of 1 to 10 microns.

25 Each of the dielectric layers may be deposited by a sputtering technique or by a vacuum evaporation technique.

30 According to a third aspect of the present invention, there is provided a method of providing a protective cap on a first electrode of an organic light-emitting device comprising at least one layer of a light-emissive organic material between first and second electrodes for injecting charge carriers into the light-emissive organic material, said method comprising the step of forming a first layer of a dielectric material on the surface of the first electrode opposite the layer of light-emissive organic material by a vacuum evaporation technique.

35 The first electrode typically comprises one or more metal layers with the dielectric layer being formed directly on the surface of the outermost metal layer remote from the organic light-emissive material.

40 Further barrier layers and/or gettering layers of the kind discussed above can be provided on the first dielectric layer.

5 As with the first and second aspects of the present invention, the advantages of the third aspect of the present invention are pronounced when the subject electrode has been deposited by a vacuum evaporation technique.

10 Hereunder, preferred embodiments of the present invention will be described, by way of example only, with reference to the accompanying drawings in which:-

15 Figure 1 is a schematic cross-sectional view of an organic light-emitting device according to a first embodiment of the present invention.

Figure 2 is a schematic cross-sectional view of an organic light-emitting device according to a second embodiment of the present invention.

20 Figure 3 is a schematic cross-sectional view of an organic light-emitting device according to a third embodiment of the present invention.

Figure 4 is a schematic cross-sectional view of an organic light-emitting device according to a fourth embodiment of the present invention.

25 Figure 5 is a schematic cross-sectional view of an organic light-emitting device according to a fifth embodiment of the present invention.

30 Figure 6 is a schematic cross-sectional view of an organic light-emitting device according to a sixth embodiment of the present invention.

Figure 7 is a schematic cross-sectional view of an organic light-emitting device according to a seventh embodiment of the present invention.

35 An organic light-emitting device according to a first embodiment of the present invention is shown in Figure 1. The device comprises a first electrode layer 4, in this case an anode layer comprised of indium tin oxide (ITO) formed on a substrate 2. The substrate may, for example, be one made of glass or a flexible plastic substrate or may be a glass-plastic laminate. A first thin film 6 of a light-emissive organic material (in this case, poly(phenylenevinylene) (PPV)) is formed on the ITO layer 4. This organic PPV layer can be formed by spin-coating a precursor to PPV in a suitable solvent onto the ITO layer and then heating the spin-coated layer to convert the precursor to the polymer PPV. A second thin film 8 of an organic material (such as MEH-PPV) is formed on the first thin film of light-emissive organic material 6. This second thin film 8 can, for example, be formed in the same general manner as the first thin film 6 of light-emissive organic material. The

second thin film of organic material may serve as a light-emissive layer or a charge transport layer or have some other purpose. Further light-emissive organic layers can be provided.

Alternatively, layer 6 could be a charge-transport layer such as polyethylenedioxythiophene doped with polystyrene sulphonic acid (PEDT:PSS), or polyaniline and the second thin film 8 may be the light-emissive layer such as a blend of 5% poly(2,7-(9,9-di-n-octylfluorene)-3,6-(benzothiadiazole) with 95% poly(2,7-(9,9-di-n-octylfluorene) (SF8BT), poly(2,7-(9,9-di-n-octylfluorene) (F8), poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-methylphenyl)imino)-1,4-phenylene-((4-methylphenyl)imino)-1,4-phenylene))/poly(2,7-(9,9-di-n-octylfluorene) (PFM:F8), poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-methoxyphenyl)imino)-1,4-phenylene-((4-methoxyphenyl)imino)-1,4-phenylene))/poly(2,7-(9,9-di-n-octylfluorene)/poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((1,4-phenylene-((4-secbutylphenyl)imino)-1,4-phenylene)) (PFMO:F8:TFB).

A thin layer 10 of calcium having a thickness of 200nm is formed on the second thin film of organic material 8. This calcium layer functions as a cathode and can be formed, for example, by rf sputtering or dc magnetron sputtering (preferably using neon as a discharge gas) or by vacuum evaporation. Vacuum evaporation is the preferred technique because it causes less damage to the underlying organic material than a sputtering technique.

A thick layer of aluminium nitride 12 having a thickness of about 10 microns is formed on the thin layer of calcium 10. This aluminium nitride layer is preferably deposited by sputtering to provide a pinhole-free layer. A conventional sputtering technique such as rf sputtering or dc magnetron sputtering may be employed using a sputter target/cathode made of aluminium and a discharge gas containing nitrogen.

This thick aluminium nitride layer 12 is very impermeable with respect to ambient species such as oxygen and moisture and therefore serves to effectively protect the underlying calcium cathode layer from these reactive species.

5 An organic light-emitting device according to a second embodiment of the present invention is shown in Figure 2. It is identical to the device shown in Figure 1 except that an additional layer 14 of aluminium having a thickness of 5 microns is provided between the thin calcium layer 10 and the thick layer of aluminium nitride 12 as a second cathode layer. In this case, this intermediate layer of aluminium is formed by vacuum evaporation, but it could alternatively be formed by a sputtering technique for example.

10 An organic light-emitting device according to a third embodiment of the present invention is shown in Figure 3. It is similar to the device shown in Figure 2 except that a thick layer 16 of aluminium oxide having a thickness of about 10 microns is provided on the thick layer of aluminium nitride 12. This top layer of aluminium oxide is preferably formed by a sputtering technique in order to provide a pinhole-free layer.

15 An organic light-emitting device according to a fourth embodiment of the present invention is shown in Figure 4. This device is identical to that shown in Figure 2 except that a second layer of calcium 18 having a thickness of about 5 microns is provided between the aluminium layer 14 and the aluminium nitride layer 12. This second calcium layer is provided to getter any reactive species which may somehow manage to permeate through the overlying aluminium nitride and thus provide protection for the underlying cathode. This second layer of calcium 18 is preferably deposited by a sputtering technique in order to provide a pinhole-free layer.

20 An organic light-emitting device according to a fifth embodiment of the present invention is shown in Figure 5. This device is similar to that shown in Figure 4 except that a sputtered layer of aluminium 20 having a thickness of about 10 microns is provided between the evaporated aluminium layer 14 and the second layer of calcium 18 as an additional barrier layer. According to a further variation as shown in Figure 6, a further sputtered layer of aluminium is provided between the second calcium layer 18 and the aluminium nitride layer 12.

5 An organic light-emissive device according to a seventh embodiment of the
present invention is shown in Figure 7. This is similar to the device shown in
10 Figure 3, except that the Ca/Al two-layer cathode is capped with a 1000 Angstrom
layer 24 of SiO deposited by thermal evaporation from a high temperature ceramic
boat and a 10 micron layer 26 of aluminium nitride deposited by sputtering. The
15 protective SiO/AlN two-layer cap employed in this embodiment provides excellent
cathode protection. It is thought that this is due to the fact that the SiO layer not
only acts as a physical barrier but also acts as a gettering layer by reacting with
moisture.

20 Although, the devices described above all demonstrate the application of the
present invention to the protection of a cathode, the present invention can equally
be applied to the protection of the anode, or both the anode and the cathode.

Claims

5

10

15

20

25

30

35

40

45

50

55

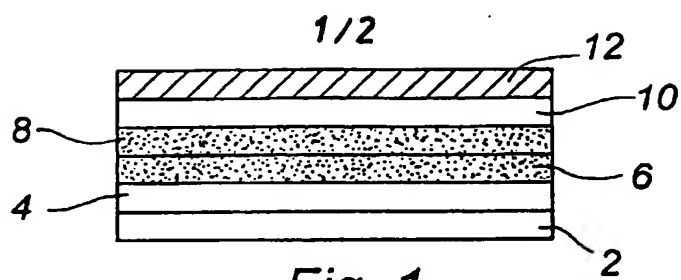
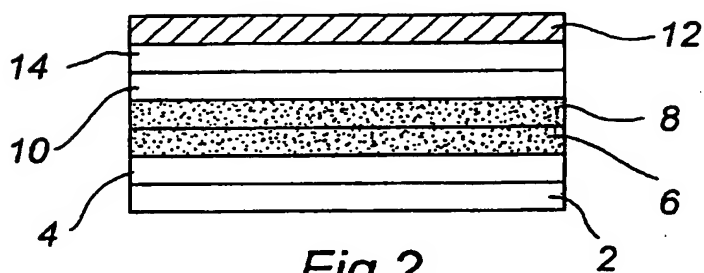
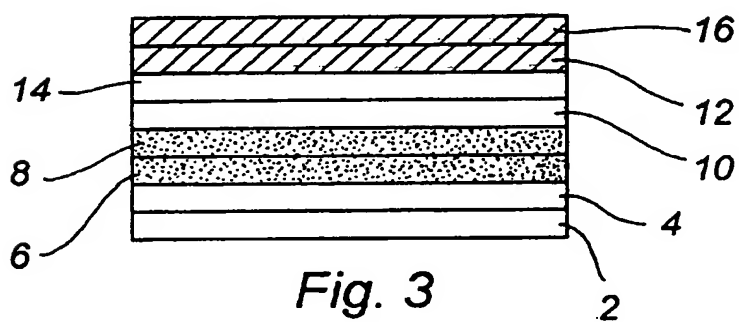
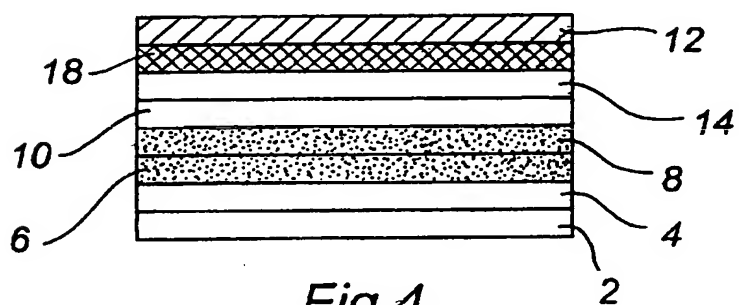
CLAIMS

1. An organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material.
2. An organic light-emitting device according to claim 1 wherein the dielectric material is selected from the group consisting of SiO, AlN, SiO₂, Si₃N₄ and Al₂O₃.
3. An organic light-emitting device according to claim 2 wherein the dielectric material is AlN.
4. An organic light-emitting device according to any preceding claim, wherein the thickness of the dielectric layer is in the range of 0.01 to 10 microns.
5. An organic light-emitting device according to claim 1 further comprising at least a second layer of dielectric material on the first layer of dielectric material, the thickness of the layers being selected so as to reduce mechanical stress on the cathode.
6. An organic light-emitting device according to claim 5 wherein the first and second layers of dielectric material comprise layers of different dielectric materials.
7. An organic light-emitting device according to claim 5 or claim 6 wherein the first and second layers of dielectric material comprise layers of materials selected from the group consisting of AlN, SiO₂, Si₃N₄ and Al₂O₃.
8. An organic light emitting device according to claim 5 wherein the first layer of dielectric material is a layer of AlN and the second layer of dielectric material is a layer of Al₂O₃.

- 5 9. An organic light-emitting device according any of claims 5 to 8 wherein
the first and second layers of dielectric material each have thicknesses in
the range of 0.01 to 10 microns
- 10 10. An organic light emitting device comprising at least one layer of a light-
emissive organic material interposed between a first electrode and a second
electrode, at least one of the first and second electrodes comprising one or
15 more electrode layers on the light-emissive material for injecting charge
carriers into the light-emissive material; wherein the organic light-emitting
device further has a stack comprising a first inert barrier layer and at least
one gettering layer interposed between the outermost electrode layer and
the first inert barrier layer for absorbing moisture and oxygen.
- 20 11. An organic light-emitting device according to claim 10 wherein the first
inert barrier layer is a layer of a material selected from the group consisting
of AlN, Al₂O₃, SiO₂ and Si₃N₄, and is preferably a layer of AlN.
- 25 12. An organic light-emitting device according to claim 10 wherein the first
inert barrier layer has a thickness in the range of 0.01 to 10 microns.
- 30 13. An organic light-emitting device according to claim 1 wherein the stack
further comprises a second inert barrier layer interposed between the
gettering layer and the surface of the outermost electrode layer remote from
the layer of light-emissive organic material.
- 35 14. An organic light-emitting device according to claim 13 wherein the second
inert barrier layer is a layer of sputtered aluminium and the first inert
barrier layer is a layer of AlN.
- 40 15. An organic light-emitting device according to claim 13 wherein the first
and second inert barrier layers each have a thickness in the range of 0.01 to
10 microns.
- 45 16. An organic light-emitting device according to any of claims 10 to 15
wherein the gettering layer is a layer of a reactive metal or metal alloy, or a
hygroscopic oxide.
- 50 17. An organic light-emitting device according to claim 16 wherein the
gettering layer is a layer of BaO.
- 55 18. An organic light-emitting device according to claim 16 wherein the
gettering layer is a layer of a material selected from the group consisting of
Li, Ca, LiAl, Ba and Cs.

- 5 19. An organic light-emitting device according to claim 18 wherein the
gettering layer is a layer of Ca.
- 10 20. An organic light-emitting device according to any of claims 10 to 19
wherein the thickness of the gettering layer is in the range of 0.01 to 5
microns.
- 15 21. An organic light emitting device according to claim 10 wherein at least one
of the first and second electrodes is a multi-layered electrode comprising a
first low work function conductive layer on the layer of light-emissive
organic material and a second conductive layer on the surface of the first
low work function conductive layer remote from the layer of light-emissive
organic material.
- 20 22. An organic light-emitting device according to claim 21 wherein the first
low work function conductive layer is an evaporated layer of calcium
having a thickness of 200nm or less, and the second conductive layer is a
layer of evaporated aluminium having a thickness of 5 microns or less.
- 25 23. A method of providing a protective cap on a first electrode of an organic
light-emitting device comprising at least one layer of a light-emissive
organic material between first and second electrodes for injecting charge
carriers into the light-emissive organic material, said method comprising
30 the step of forming a first layer of a dielectric material on the surface of the
first electrode opposite the layer of light-emissive organic material by a
vacuum evaporation technique.
- 35 24. A method according to claim 23 further comprising the step of forming a
second layer of a dielectric material on the surface of the first layer of the
dielectric material opposite the first electrode.
- 40 25. A method according to claim 23 or claim 24 wherein the first layer of
dielectric material comprises a layer of silicon monoxide.
- 45 26. A method according to any of claims 23 to 25 wherein the first layer of
dielectric material has a thickness in the range of 10 to 10,000 Angstroms.
27. A method according to claim 26 wherein the first layer of dielectric
material has a thickness in the range of 100 to 2000 Angstroms.
- 50 28. A method according to claim 27 wherein the first layer of dielectric
material has a thickness in the range of about 1000 Angstroms.

- 5 29. A method according to claim 24 wherein the second layer of dielectric material is formed by a sputtering technique.
30. A method according to claim 24 wherein the second layer of dielectric material comprises a layer of a material selected from the group consisting
- 10 of AlN, SiO₂, Si₃N₄ and Al₂O₃.
31. An organic light-emitting device produced by a method according to any one of claims 23 to 30.
- 15 32. An organic light-emitting device substantially as hereinbefore described with reference to the accompanying drawings.

*Fig. 1**Fig. 2**Fig. 3**Fig. 4*

SUBSTITUTE SHEET (RULE 26)

2/2

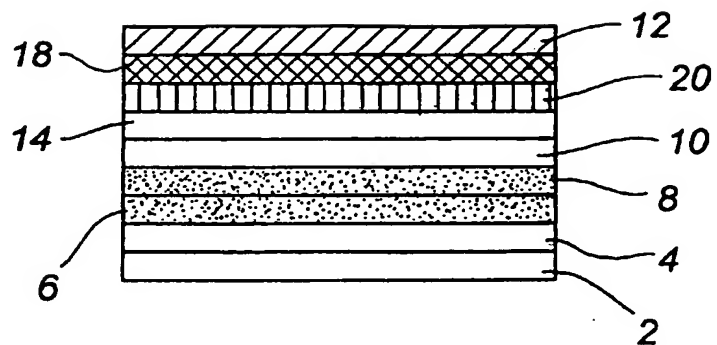


Fig. 5

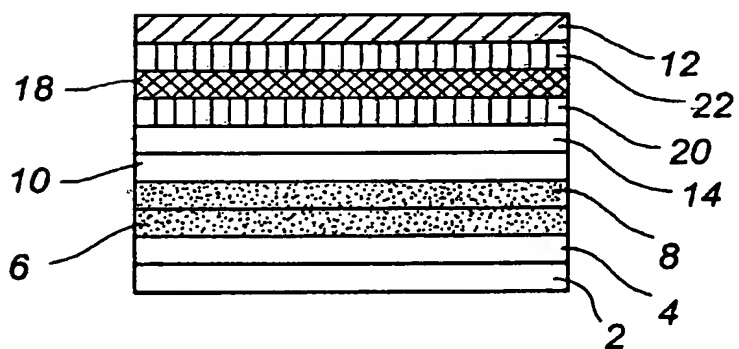


Fig. 6

INTERNATIONAL SEARCH REPORT

Patent Application No.

PCT/GB 99/04144

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01L51/20

According to International Patent Classification (IPC) or to both national classification and IPO

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H01L H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 16053 A (ROBERT BOSCH GMBH) 1 May 1997 (1997-05-01)	1,5,6, 10,11, 13,16, 18,19, 21,23, 31,32
Y A	the whole document	17 2,3
Y	EP 0 740 489 A (PIONEER ELECTRONIC CORP) 30 October 1996 (1996-10-30) page 2, line 25-39	17
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the International filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

A document member of the same patent family

Date of the actual completion of the International search

8 March 2000

Date of mailing of the International search report

15/03/2000

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Peter/Dean 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

van der Linden, J.E.

INTERNATIONAL SEARCH REPORT

Int'l Application No.

PCT/GB 99/04144

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 777 280 A (MOTOROLA INC) 4 June 1997 (1997-06-04)	1,5-7, 10,13, 16,18, 23,24, 29-32
A	column 6, line 15 -column 7, line 22	2,25
X	EP 0 741 419 A (MOTOROLA INC) 6 November 1996 (1996-11-06)	1,2,4, 23, 26-28, 31,32
A	column 2, line 34 -column 3, line 53	10
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 10, 30 November 1995 (1995-11-30) & JP 07 169567 A (IDENITSU KOSAN CO LTD), 4 July 1995 (1995-07-04)	1,5,6, 10,13, 31,32
A	abstract	2,3,7, 11,23
X	WO 98 10473 A (CAMBRIDGE DISPLAY TECH) 12 March 1998 (1998-03-12)	1,31,32
A	claims 1,16,64,165	2,3,23
P,X	WO 98 59528 A (FED CORP) 30 December 1998 (1998-12-30)	1,2,5-7, 10,11, 23-25, 29-32
P,A	page 7, line 19 -page 9, line 10 page 11, line 13 -page 13, line 29	13
P,X	WO 99 02277 A (FED CORP) 21 January 1999 (1999-01-21)	1,2,5-7, 23-25, 29-32
P,A	page 6, line 6 -page 9, line 22	10

1

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/GB 99/04144

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9716053 A	01-05-1997	DE 19603746 A	24-04-1997
EP 0740489 A	30-10-1996	JP 9017574 A	17-01-1997
		DE 69605968 D	10-02-2007
		US 5739635 A	14-04-1998
EP 0777280 A	04-06-1997	US 5686360 A	11-11-1997
		JP 9161967 A	20-06-1997
		US 5757126 A	26-05-1998
EP 0741419 A	06-11-1996	US 5771562 A	30-06-1998
		CN 1139293 A	01-01-1997
		JP 8306955 A	22-11-1996
JP 07169567 A	04-07-1995	NONE	
WO 9810473 A	12-03-1998	CN 1228911 A	15-09-1999
		EP 0925709 A	30-06-1999
		EP 0946993 A	06-10-1999
		WO 9810621 A	12-03-1998
		GB 2333181 A	14-07-1999
		GB 2332094 A	09-06-1999
WO 9859528 A	30-12-1998	US 5920080 A	06-07-1999
WO 9902277 A	21-01-1999	WO 9903087 A	21-01-1999